

Powerful Brands from Wiha.

Proturn® 3K
Proturn® 1K



 AC 1000V
IEC 60900:2004



www.wiha.com

Wiha. Premium Tools
for Professionals.

Wiha Proturm® 3K.

The Handy All-Rounder.



The Wiha Proturm® 3K is a screwdriver with a multi-component handle. Both industrial users as well as do-it-yourselfers are both equally convinced of the tool's features and versatility. The convincing handle design with hard and soft zones allows an optimum of usability. Due to this material combination, maximum torque transfer with a minimum of effort is provided.

An additional characteristic is the practical hanging hole – ideal to show the screwdriver on commercially available display hooks. The blades are made of high-quality chrome-vanadium-molybdenum steel, through hardened and chromium plated. The precision machined black tip guarantees dimensional accuracy over many years.

Wiha Proturm® 3K screwdrivers are available in all common dimensions and in different sets.



Wiha Proturm® 3K:

- Convincing handle design with hard and soft zones and practical hanging hole
- Enables maximum torque transfer with minimised effort
- Suitable for industrial, trade and do-it-yourselfers
- Blades made of high-quality CVM steel, through hardened and chromium plated
- Precision machined black tip
- Manufactured acc. to all relevant DIN/ISO standards



For Slotted and Phillips Screws



450N Proturm® 3K Slotted Screwdriver.

Blade: **Round blade.**
High quality CVM steel, through hardened.
Chromium plated with precise black tip.

Handle: Proturm® 3K multi-component handle with hanging hole.

Standards: DIN 5265, ISO 2380.

Application: An ergonomic screwdriver for your every day applications.

Order-No.	mm	mm	mm	mm	mm	mm	Box Qty	
27612	6	0.4	2.5	75	2.5	86	26	10
25436	0	0.5	3.0	80	3.0	86	26	10
27768	0	0.5	3.0	100	3.0	86	26	10
27769	7	0.5	3.0	150	3.0	86	26	10
25437	7	0.6	3.5	100	3.5	100	30	10
25438	4	0.8	4.0	100	4.0	107	33	10
27770	3	0.8	4.5	80	4.5	107	33	10
27611	9	0.8	4.5	125	4.5	107	33	10
25439	1	1.0	5.5	125	5.5	119	37	10
27771	0	1.0	6.0	100	6.0	119	37	10
27772	7	1.0	6.0	150	6.0	119	37	10
25440	7	1.2	6.5	150	6.5	119	37	10
25441	4	1.2	8.0	175	8.0	119	37	10
25442	1	1.6	10.0	200	8.0	119	37	10



451N Proturm® 3K Phillips Screwdriver.

Blade: **Round blade.**
High quality CVM steel, through hardened.
Chromium plated with precise black tip.

Handle: Proturm® 3K multi-component handle with hanging hole.

Standards: ISO 8764.

Application: An ergonomic screwdriver for your every day applications.

Order-No.	mm	mm	mm	mm	Box Qty		
25443	8	PH0	60	3.0	86	26	10
27773	4	PH0	100	3.0	86	26	10
25444	5	PH1	80	4.5	107	33	10
27774	1	PH1	100	4.5	107	33	10
25445	2	PH2	100	6.0	119	37	10
27775	8	PH2	150	6.0	119	37	10
25475	3	PH3	150	8.0	119	37	10

For Pozidriv and TORX® Screws.



452N Proturm® 3K Pozidriv Screwdriver.

Blade: **Round blade.**
High quality CVM steel, through hardened.
Chromium plated with precise black tip.

Handle: Proturm® 3K multi-component handle with hanging hole.

Standards: ISO 8764.

Application: An ergonomic screwdriver for your every day applications.

Order-No.	mm	mm	mm	mm	Box Qty		
25448	3	PZ0	60	3.0	86	26	10
27776	5	PZ0	100	3.0	86	26	10
25449	0	PZ1	80	4.5	107	33	10
27777	2	PZ1	100	4.5	107	33	10
25450	2	PZ2	100	6.0	119	37	10
27778	9	PZ2	150	6.0	119	37	10
25451	3	PZ3	150	8.0	119	37	10



455N Proturm® 3K TORX® Screwdriver.

Blade: **Round blade.**
High quality CVM steel, through hardened.
Chromium plated with precise black tip.

Handle: Proturm® 3K multi-component handle with hanging hole.

Application: An ergonomic screwdriver for your every day applications.

Order-No.	mm	mm	mm	mm	Box Qty		
25452	0	T6	60	3.5	86	26	10
25453	7	T7	60	3.5	86	26	10
25454	4	T8	60	3.5	86	26	10
25455	1	T9	60	4.0	100	30	10
25456	8	T10	80	4.0	100	30	10
25457	5	T15	80	4.0	107	33	10
25458	2	T20	100	4.0	107	33	10
25459	9	T25	100	4.5	107	33	10
27610	2	T27	115	5.5	119	37	10
25460	5	T30	115	6.0	119	37	10
25461	2	T40	130	7.0	119	37	10

Wiha Proturm® 3K.

The Handy All-Rounder.

Bit Holder.



484N Proturm® 3K Bit Holder 1/4", magnetic.
 Shaft: Made of CV steel, through hardened, nickel plated.
 Bit retainer: Magnetic, holds bit and screw.
 Standards: DIN 3126-D 6.3 / ISO 1173
 Handle: Proturm® 3K multi-component handle with hanging hole.

Order-No.	Inch	mm	mm	mm	Box Qty
25550 3	1/4"	125	107	33	10

Sets.



450N ZK6 Proturm® 3K Slotted/Pozidriv Screwdriver Set, 6-pcs.

Order-No.	Series					Box Qty
25447 6						1
①	450N	3.5x100	4.5x125	5.5x125	6.5x150	
⊕	452N	PZ1x80	PZ2x100			



450N HK6 Proturm® 3K Slotted/Phillips Screwdriver Set, 6-pcs.

Order-No.	Series					Box Qty
25446 9						1
①	450N	3.5x100	4.5x125	5.5x125	6.5x150	
⊕	451N	PH1x80	PH2x100			



455N K6 Proturm® 3K TORX® Screwdriver Set, 6-pcs.

Order-No.	Series					Box Qty	
25462 9						1	
⊕	455N	T10	T15	T20	T25	T30	T40

Wiha Proturm® 1K.

The Multi-use Screwdriver.



The Wiha Proturm® 1K series screwdrivers are extremely economic. They have been developed to fulfil many industrial and trade applications. The handy, rounded handles are made of impact resistant polypropylene. All blades are manufactured from high-quality chrome-vanadium-molybdenum steel, through hardened and have a precision black tip. Hardness, torque and dimensional accuracy of each screwdriver meet all DIN/ISO specifications.

Wiha Proturm® 1K screwdrivers are offered in all popular dimensions, including the Proturm® 1K Stubby for working in confined spaces – at an unbeatable, attractive price.



Wiha Proturm® 1K:

- Handy, rounded handle made of polypropylene
- Developed for many industrial and trade applications
- Blades made of high-quality CVM steel, through hardened and chromium plated
- Precision machined black tip
- Manufactured acc. to all relevant DIN/ISO standards



4460

Proturm® 1K Slotted Screwdriver.

Blade:

Round blade.

High quality CVM steel, through hardened.
Chromium plated with precise black tip.

Handle:

Proturm® 1K handle in blue polypropylene.

Standards:

DIN 5265, ISO 2380.

Application:

For multipurpose use in industrial and trade applications.

Order-No.	⌀	⌀	—	●	—	—	Box Qty	
	mm	mm	mm	mm	mm	mm		
28200	4	0.4	2.5	75	2.5	80	24	10
27780	2	0.5	3.0	80	3.0	80	24	10
27781	9	0.5	3.0	100	3.0	80	24	10
27782	6	0.5	3.0	150	3.0	80	24	10
27783	3	0.6	3.5	100	3.5	90	27	10
27784	0	0.8	4.0	100	4.0	100	30	10
27785	7	0.8	4.5	80	4.5	100	30	10
27786	4	0.8	4.5	125	4.5	100	30	10
27787	1	1.0	5.5	125	5.5	110	34	10
27788	8	1.0	6.0	100	6.0	110	34	10
27789	5	1.0	6.0	150	6.0	110	34	10
27790	1	1.2	6.5	150	6.5	110	34	10
27791	8	1.2	8.0	175	8.0	110	34	10
27792	5	1.6	10.0	200	8.0	110	34	10

Wiha Proturm® 1K.

The Multi-use Screwdriver.

For Phillips and Pozidriv Screws.



4461 Proturm® 1K Phillips Screwdriver.
Blade: Round blade.
 High quality CVM steel, through hardened.
 Chromium plated with precise black tip.
Handle: Proturm® 1K handle in blue polypropylene.
Standards: ISO 8764.
Application: For multipurpose use in industrial and trade applications.

Order-No.						Box Qty
	mm	mm	mm	mm	mm	
27793 2	PH0	60	3.0	80	24	10
27794 9	PH0	100	3.0	80	24	10
27795 6	PH1	80	4.5	100	30	10
27796 3	PH1	100	4.5	100	30	10
27797 0	PH2	100	6.0	110	34	10
27798 7	PH2	150	6.0	110	34	10
27799 4	PH3	150	8.0	110	34	10



4462 Proturm® 1K Pozidriv Screwdriver.
Blade: Round blade.
 High quality CVM steel, through hardened.
 Chromium plated with precise black tip.
Handle: Proturm® 1K handle in blue polypropylene.
Standards: ISO 8764.
Application: For multipurpose use in industrial and trade applications.

Order-No.						Box Qty
	mm	mm	mm	mm	mm	
27800 7	PZ0	60	3.0	80	24	10
27801 4	PZ0	100	3.0	80	24	10
27802 1	PZ1	80	4.5	100	30	10
27804 5	PZ1	100	4.5	100	30	10
27805 2	PZ2	100	6.0	110	34	10
27806 9	PZ2	150	6.0	110	34	10
27807 6	PZ3	150	8.0	110	34	10

Stubby Screwdrivers.



4460 Proturm® 1K Slotted Screwdriver.
Blade: Short round blade.
 High quality CVM steel, through hardened.
 Chromium plated with precise black tip.
Handle: Proturm® 1K handle in blue polypropylene.
Standards: DIN 5265, ISO 2380, Handle DIN 5268 - Style K.
Application: For working in confined spaces.

Order-No.							Box Qty
	mm	mm	mm	mm	mm	mm	
27832 8	0.8	4.0	25	4.0	50	32	10
27833 5	1.0	5.5	25	5.0	50	32	10
27834 2	1.2	6.5	25	6.5	50	32	10
27835 9	1.2	8.0	25	8.0	50	32	10



4461 Proturm® 1K Phillips Screwdriver.
Blade: Short round blade.
 High quality CVM steel, through hardened.
 Chromium plated with precise black tip.
Handle: Proturm® 1K handle in blue polypropylene.
Standards: DIN 5265, ISO 2380, Handle DIN 5268 - Style K.
Application: For working in confined spaces.

Order-No.						Box Qty
	mm	mm	mm	mm	mm	
27836 6	PH01	25	4.5	50	32	10
27837 3	PH02	25	6.0	50	32	10
27838 0	PH03	25	8.0	50	32	10



4462 Proturm® 1K Pozidriv Screwdriver.
Blade: Short round blade.
 High quality CVM steel, through hardened.
 Chromium plated with precise black tip.
Handle: Proturm® 1K handle in blue polypropylene.
Standards: DIN 5265, ISO 2380, Handle DIN 5268 - Style K.
Application: For working in confined spaces.

Order-No.						Box Qty
	mm	mm	mm	mm	mm	
27839 7	PZ01	25	4.5	50	32	10
27840 3	PZ02	25	6.0	50	32	10
27841 0	PZ03	25	8.0	50	32	10

For TORX® and Hex Nuts.



4465 Proturm® 1K TORX® Screwdriver.

Blade: Round blade.

High quality CVM steel, through hardened.
Chromium plated with precise black tip.

Handle: Proturm® 1K handle in blue polypropylene.

Application: For multipurpose use in industrial and trade applications.

Order-No.						Box Qty
	mm	mm	mm	mm	mm	
27821 2	T6	60	3.5	80	24	10
27822 9	T7	60	3.5	80	24	10
27823 6	T8	60	3.5	80	24	10
27824 3	T9	60	4.0	90	27	10
27825 0	T10	80	4.0	90	27	10
27826 7	T15	80	4.0	100	30	10
27827 4	T20	100	4.0	100	30	10
27828 1	T25	100	4.5	100	30	10
27829 8	T27	115	5.5	110	34	10
27830 4	T30	115	6.0	110	34	10
27831 1	T40	130	7.0	110	34	10



4484 Proturm® 1K Bit Holder 1/4", magnetic.

Shaft: Made of CV steel, through hardened, nickel plated.

Bit retainer: Magnetic, holds bit and screw.

Standards: DIN 3126-D 6.3 / ISO 1173

Handle: Proturm® 1K handle in blue polypropylene

Order-No.					Box Qty
	Inch	mm	mm	mm	
28204 2	1/4"	125	106	30	10

Sets.



4460 HK6 Proturm® 1K Slotted/Phillips Screwdriver Set, 6-pcs.

Order-No.	Series					Box Qty
27842 7						1
① 4460		3.5x100	4.5x125	5.5x125	6.5x150	
⊕ 4461		PH1x80	PH2x100			



4460 ZK6 Proturm® 1K Slotted/Pozidriv Screwdriver Set, 6-pcs.

Order-No.	Series					Box Qty
27843 4						1
① 4460		3.5x100	4.5x125	5.5x125	6.5x150	
⊕ 4462		PZ1x80	PZ2x100			



4465 K6 Proturm® 1K TORX® Screwdriver Set, 6-pcs.

Order-No.	Series							Box Qty
27844 1								1
⊕ 4465		T10	T15	T20	T25	T30	T40	



NEW 4465 K5 Proturm® 1K TORX® Screwdriver Set, 5-pcs.



Order-No.	Series						Box Qty
28551 7							1
⊕ 4465		T10	T15	T20	T25	T30	

Wiha Proturn® 3K electric.

The Premium Insulated VDE Screwdriver.



   **AC 1000V**
IEC 60900:2004

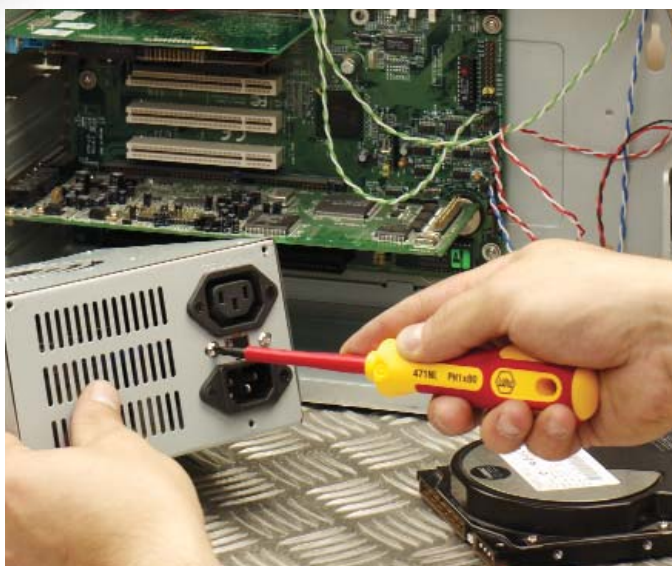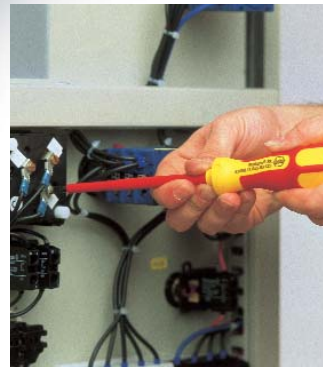

The Proturn® 3K electric insulated VDE screwdriver combines excellent functionality along with an attractive price. The ergonomic multi-component handle with the practical hanging hole provides a firm hold and maximum torque. The blade is made of high-quality chrome-vanadium-molybdenum steel, through hardened with a black oxide tip for exceptional strength and durability.

The blade insulation is moulded directly onto the blade, making handle and blade inseparable. For user safety and comfort, each screwdriver is tested in a water bath at 10,000 volts. This guarantees maximum protection against electrical shock, when working on live equipment up to 1000 V AC resp. 1500 V DC.



Wiha Proturn® 3K electric:

- Comfortable multi-component handle with practical hanging hole makes the tool comfortable to use all day
- Blades made of high-quality CVM steel, through hardened, black oxide finish
- Insulation moulded directly onto blade
- Each screwdriver is tested in accordance with EN/IEC 60900:2004
- For working on live equipment up to 1000 V AC/ 1500 V DC

For Slotted and Phillips Screws.



AC 1000V
IEC 60900:2004

470N Proturm® 3K electric VDE Slotted Screwdriver.
Insulation up to 1000 V AC, GS-Mark.

Blade: High quality CVM steel, through hardened, black finish.
Insulation moulded directly onto blade.

Handle: Proturm® 3K electric insulated multi-component handle with hanging hole.

Standards: DIN 7437, DIN 5264, ISO 2380.
Manufactured acc. to EN/IEC 60900:2004.

Application: For electrical applications up to 1000 V AC.

Order-No.	mm	mm	mm	mm	mm	Box Qty
25463 6	0.4	2.5	75	86	26	10
25464 3	0.5	3.0	100	86	26	10
25465 0	0.6	3.5	100	100	30	10
25466 7	0.8	4.0	100	107	33	10
25467 4	1.0	4.5	125	107	33	10
25468 1	1.0	5.5	125	119	37	10
25469 8	1.2	6.5	150	119	37	10
25470 4	1.2	8.0	175	119	37	10
27845 8	1.6	10.0	200	119	37	10



AC 1000V
IEC 60900:2004

471N Proturm® 3K electric VDE Phillips Screwdriver.
Insulation up to 1000 V AC, GS-Mark.

Blade: High quality CVM steel, through hardened, black finish.
Insulation moulded directly onto blade.

Handle: Proturm® 3K electric insulated multi-component handle with hanging hole.

Standards: ISO 8764.
Manufactured acc. to EN/IEC 60900:2004.

Application: For electrical applications up to 1000 V AC.

Order-No.	mm	mm	mm	Box Qty	
27689 8	PH0	60	86	26	10
25471 1	PH1	80	107	33	10
25472 8	PH2	100	119	37	10
25474 2	PH3	150	119	37	10

For Pozidriv and TORX® Screws.



AC 1000V
IEC 60900:2004

472N Proturm® 3K electric VDE Pozidriv Screwdriver.
Insulation up to 1000 V AC, GS-Mark.

Blade: High quality CVM steel, through hardened, black finish.
Insulation moulded directly onto blade.

Handle: Proturm® 3K electric insulated multi-component handle with hanging hole.

Standards: DIN 7438, ISO 8764.
Manufactured acc. to EN/IEC 60900:2004.

Application: For electrical applications up to 1000 V AC.

Order-No.	mm	mm	mm	Box Qty	
27849 6	PZ1	80	107	33	10
27850 2	PZ2	100	119	37	10
27851 9	PZ3	150	119	37	10



AC 1000V
IEC 60900:2004

475N Proturm® 3K electric VDE TORX® Screwdriver.
Insulation up to 1000 V AC, GS-Mark.

Blade: High quality CVM steel, through hardened, black finish.
Insulation moulded directly onto blade.

Handle: Proturm® 3K electric insulated multi-component handle with hanging hole.

Standards: Manufactured acc. to EN/IEC 60900:2004.
Application: For electrical applications up to 1000 V AC.

Order-No.	mm	mm	mm	mm	Box Qty	
27852 6	T6	60	3.0	86	26	10
27853 3	T7	60	3.5	86	26	10
27854 0	T8	60	3.5	86	26	10
27855 7	T9	60	4.0	100	30	10
27856 4	T10	60	4.0	100	30	10
27857 1	T15	80	4.0	107	33	10
27858 8	T20	80	4.0	107	33	10
27859 5	T25	80	4.5	107	33	10
27860 1	T30	100	6.0	119	37	10
27861 8	T40	150	7.0	119	37	10

Wiha Protum® 3K electric.

The Premium Insulated VDE Screwdriver.

Sets.



AC 1000V
IEC 60900:2004

470N K6 Protum® 3K electric VDE Slotted/Phillips Screwdriver Set, 6-pcs.
Insulation up to 1000 V AC, GS-Mark.

Blade: High quality CVM steel, through hardened, black finish.

Insulation moulded directly onto blade.

Handle: Protum® 3K electric insulated multi-component handle with hanging hole.

Standards: Manufactured acc. to EN/IEC 60900:2004.

Application: For electrical applications up to 1000 V AC.

Order-No.	Series					Box Qty
25473 5						1
⓪ 470N	3.0x100	4.0x100	5.5x125	6.5x150		
⊕ 471N	PH1x80	PH2x100				

Sets.

With Voltage Tester



AC 1000V
IEC 60900:2004

470N K601 Protum® 3K electric VDE Slotted/Phillips Screwdriver Set with Voltage Tester, 6-pcs.
Insulation up to 1000 V AC, GS-Mark.

Blade: High quality CVM steel, through hardened, black finish.

Insulation moulded directly onto blade.

Handle: Protum® 3K electric insulated multi-component handle with hanging hole.


Standards: Manufactured acc. to EN/IEC 60900:2004.

Application: For electrical applications up to 1000 V AC.

Order-No.	Series				Box Qty
28184 7					1
⓪ 470N	2.5x75	4.0x100	5.5x125		
⊕ 471N	PH1x80	PH2x100			
⓪ 255-3	3.0 Voltage Tester				

Wiha Proturm® 1K electric.

The Practical, Insulated VDE Screwdriver.

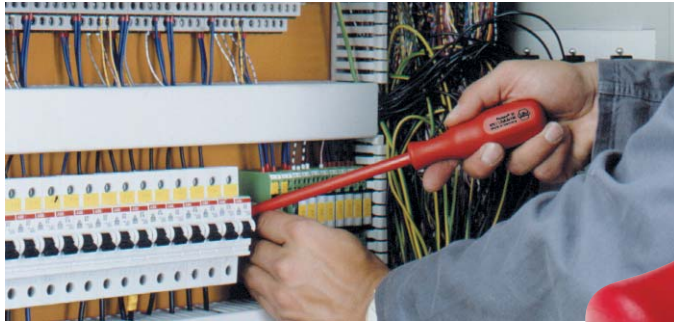

   **AC 1000V**
IEC 60900:2004

There is no other workplace more important for safety screwdrivers than when working on voltage applications.

Our insulated Proturm® 1K electric screwdrivers are manufactured according to international EN/IEC 60900:2004 standards and their isolation characteristics tested in a 10,000 volt water bath. The handle is made of impact resistant polypropylene. The blade is made of high-quality chrome-vanadium-molybdenum steel, through hardened with a black oxide finish tip.

Thanks to the use of the best materials and manufacturing technology, with a Proturm® 1K electric you get a quality product.



Wiha Proturm® 1K electric:

- VDE insulated screwdriver, made of impact resistant polypropylene
- Blades made of high-quality CVM steel, through hardened, black oxide finish
- Each individual tool is tested to 10,000 volts acc. to EN/IEC 60900:2004
- Insulation moulded directly onto blade for permanent bonding
- Suitable for use on live lines up to 1000 V AC/ 1500 V DC



   **AC 1000V**
IEC 60900:2004

470 Proturm® 1K electric VDE Slotted Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Blade: High quality CVM steel, through hardened, black finish.
Insulation moulded directly onto blade.

Handle: Proturm® 1K electric fully insulated VDE handle.

Standards: DIN 7437, DIN 5264, ISO 2380.

Manufactured acc. to EN/IEC 60900:2004.

Application: For electrical applications up to 1000 V AC.

Order-No.	⌀	⌀1	—	—	—	Box Qty
06179 1	0.4	2.5	75	80	24	10
06180 7	0.5	3.0	100	80	24	10
06181 4	0.6	3.5	100	90	27	10
06182 1	0.8	4.0	100	100	30	10
06183 8	1.0	4.5	125	100	30	10
06184 5	1.0	5.5	125	110	34	10
06186 9	1.2	6.5	150	110	34	10
06187 6	1.2	8.0	175	110	34	10
06188 3	1.6	10.0	200	110	34	10



   **AC 1000V**
IEC 60900:2004

471 Proturm® 1K electric VDE Phillips Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Standards: DIN 7438, ISO 8764.

Manufactured acc. to EN/IEC 60900:2004.

Order-No.	+	mm	mm	mm	Box Qty
06175 3	PH 0	60	80	24	10
06176 0	PH 1	80	100	30	10
06177 7	PH 2	100	110	34	10
06178 4	PH 3	150	110	34	10

Wiha Proturm® 1K electric.

The Practical, Insulated VDE Screwdriver.

For Pozidriv and TORX® Screws.



472 Proturm® 1K electric VDE Pozidriv Screwdriver.
Insulation up to 1000 V AC, GS-Mark.

Standards: DIN 7438. ISO 8764. Manufactured acc. to EN/IEC 60900:2004.


Order-No.	mm	mm	mm	mm	Box Qty
06914 8	PZ1	80	80	30	10
06915 5	PZ2	100	100	34	10
07316 9	PZ3	150	110	34	10



475 Proturm® 1K electric VDE TORX® Screwdriver.
Insulation up to 1000 V AC, GS-Mark.

Standards: Manufactured acc. to EN/IEC 60900:2004.

Order-No.	mm	mm	mm	mm	mm	Box Qty
27846 5	T6	60	3.0	80	24	10
27847 2	T7	60	3.5	80	24	10
27848 9	T8	60	3.5	80	24	10
27864 9	T9	60	4.0	90	27	10
27865 6	T10	60	4.0	90	27	10
27866 3	T15	80	4.0	100	30	10
27867 0	T20	80	4.0	100	30	10
27868 7	T25	80	4.5	100	30	10
27869 4	T30	100	6.0	110	34	10
27870 0	T40	150	7.0	110	34	10

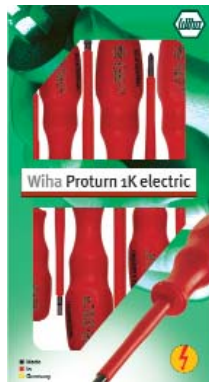

470 K6 01 Proturm® 1K electric VDE Slotted/Phillips Screwdriver Set, 6-pcs.
Insulation up to 1000 V AC, GS-Mark.

Order-No.	Series	Box Qty
27871 7	1	1
① 470	3.0x100 4.0x100 5.5x125 6.5x150	
⊕ 471	PH1x80 PH2x100	

Sets.



With Voltage Tester



470 K6 Proturm® 1K electric VDE Slotted/Phillips Screwdriver Set with Voltage Tester, 6-pcs.
Insulation up to 1000 V AC, GS-Mark.

Order-No.	Series	Box Qty
06189 0	1	1
① 470	2.5x75 4.0x100 5.5x125	
⊕ 471	PH1x80 PH2x100	
① 255-3	3.0 Voltage Tester	



With Voltage Tester



NEW
470 K7 Proturm® 1K electric VDE Slotted/Phillips Screwdriver Set with Voltage Tester, 7-pcs.
Insulation up to 1000 V AC, GS-Mark.

Order-No.	Series	Box Qty
23561 1	1	1
① 470	2.5x75 4.0x100 5.5x125 6.5x150	
⊕ 471	PH1x80 PH2x100	
① 255-3	3.0 Voltage Tester	

Please see actual Wiha Product Catalogue for general terms and conditions of sales and delivery.

Wiha Tools Ltd.
39, Sugarbrook Road,
Aston Fields Ind. Estate,
Bromsgrove, Worcs. B60 3DN
Tel. +44 1527 57 57 58
Fax +44 1527 57 55 44
sales@wiha.co.uk
www.wiha.com

Wiha Werkzeuge GmbH
Obertalstraße 3-7
D-78136 Schonach/Germany
Tel. +49 7722 959-0
Fax +49 7722 959-159
info@wiha.com
www.wiha.com